


Technical Data

GENERATION & STANDARDS

Certification	CCC, CE, FCC, RoHS, TÜV/Ergonomics (including ISO 9241-301), TÜV/Blue Light, TÜV/ Flicker-Free, TÜV/Blue Low Light, Content, TÜV/Flicker-Free, RCM, FCC, FCC-B, CAN ICES-3 (B), TÜV/S PSE, VCCI-B, GS, LONDON STAR, RoHS, WEEE, China RoHS, CCC, BSMI, EAC
Case color	Black
Area of application	Office
SOFTWARE & ACCESSORIES	<p>Product line</p> <p>FlexScan</p> <p>A companion software and other accessories are available for download.</p> <p>Screen Integrity Large and medium-sized companies, Private user & small business, Finance</p>
Control keys/adjustments	On-screen menu, OSD, Quick menu, Quick guide
SAN	9995047099108
Accessories	Power cord, Cable, H-DCOPBK, PC

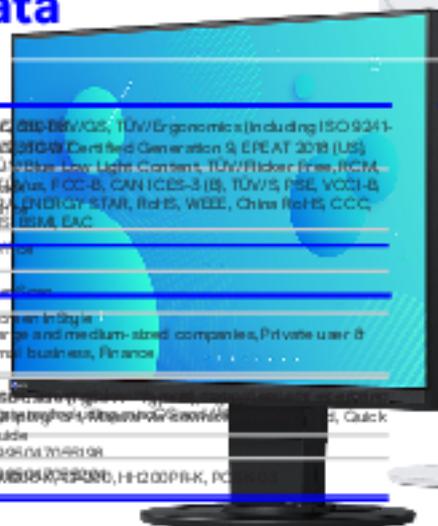

FEATURES & OPERATION

Preset color/greyscale modes	2x manual memory locations, sRGB, Paper, Movie, DICOM
DICOM tone curve	✓
Auto EcoView	✓
EcoView Index	✓
EcoView Optimizer	✓
Overdrive	✓
No flickering	✓
HDCP Decoder	✓
Automatic signal input recognition	✓
Built-in speakers	✓
On-screen menu languages	de, en, fr, es, it, zh
Adjustment options	Color Mode, Brightness, Contrast, Color temperature, Gamma, Color saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume
Button Guide	✓
Integrated power unit	✓

SCREEN TYPE

Screen type (technology)	IPS, 5 years for unit and LCD module up to 30000 operating hours, whichever comes first.
Screen size (in cm)	57.2
Included warranty	Zero pixel defects guarantee, no fully illuminated subpixels (sub-pixels) ISO 9241-307 for six months from date of purchase.
Viewable image size (width x height) (in mm)	49.62 x 277.2
Resolution	1920 x 1200
Pixel pitch	0.254 x 0.254
Viewing angle	178°
Response time	5ms



Experience the EV2360 in AR now!

Max. viewing angle horizontal 178°
Max. viewing angle vertical 178°

Number of colors or greyscale 16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DVI, 8 Bit), 16.7 million colors (DisplayPort, 8 Bit), 16.7 million colors (HDMI, 8 Bit)

✓ **22.5" LCD monitor with a 16:10 aspect ratio and IPS technology for outstanding image quality**

✓ **Bezel display is amazingly compact and ultra-elegant design**

✓ **Flicker-free image reproduction thanks to hybrid brightness control**

✓ **Auto EcoView and EcoView Optimizer deliver maximum power savings and superb ergonomics**

Signal inputs	D-Sub, DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)
USB specification	USB 5Gbps (USB 3)
USB upstream ports	1 x type B
USB downstream ports	2x type A
Graphic signal	RGB Analog, DisplayPort, HDMI (RGB, YUV)
Sync formats	Separate
Find your EIZO contact	3.5 mm stereo jack, DisplayPort, HDMI
Beigraider Stride 2 Audio/headphone output	3.5 mm stereo jack

Phone: +49 201 20120-0
www.eizo.eu

ELECTRICAL DATA

Power consumption	Power consumption (typical) (in watt)	10.5
Power consumption in stand-by mode (in watt)	0.5	
Power consumption with power switch off (in watt)	0	
Energy efficiency class	C	
Energy consumption/1000h (in kWh)	11	
Power management	✓	

✓ **Optimised antireflection properties and flexible positioning**

✓ **USB 3.1 hub with one upstream and two downstream ports**

✓ **DisplayPort, HDMI and D-sub signal inputs**

✓ **Proven to be environmentally friendly and produced in a socially responsible way**

✓ **5-year warranty for highest investment security**

Weight (with out stand) (in kg)	3.4
Dimension drawing (PDF)	Dimension drawing (PDF)
Rotatability of the stand (in °)	341
Tiltability forwards/backwards (in °)	5 / 25
Pivot between portrait / landscape	clockwise and anti-clockwise
Height adjustment range (in mm)	140
Idle spacing	100 x 100