
Technical Data

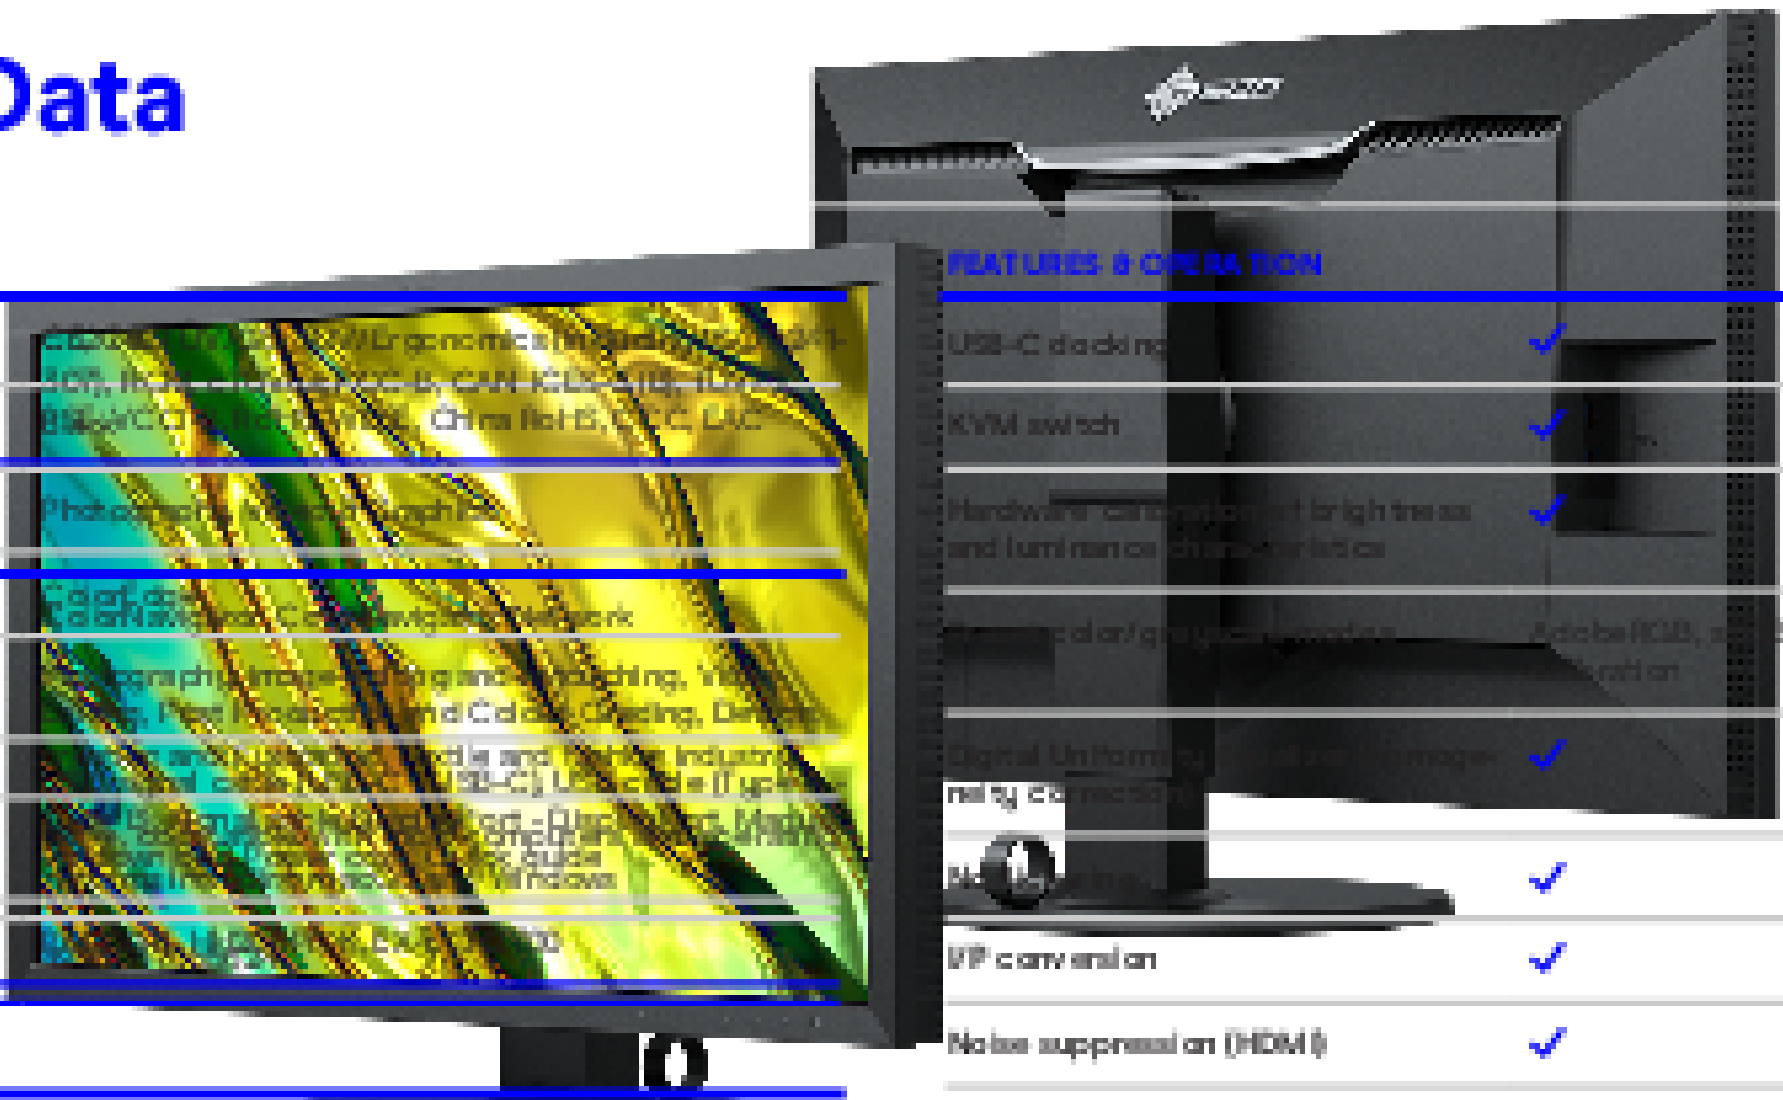

[illegible] who take photographs, right through to time-lapse photography and [illegible] borders between visual content are becoming visibly blurred, while also growing ever closer at the same time. Videographers want to see their material in 4K UHD resolution, while photographers wish to preview the full sharpness of their printed images on the monitor. The ColorEdge CS2740 from EIZO fulfils both these requirements down to a tee. A graphics monitor's most important task is to display exactly what is stored in the camera. That's why each ColorEdge CS2740 is individually measured and optimally configured in the factory. The ColorEdge CS2740's hardware can be calibrated in just 90 seconds (measured using a MacBook Pro and EX4) without loss, which means that it consistently retains its factory-set perfection across its entire service life. A powerful notebook is often the only computer available. Thanks to its four USB downstream ports and its USB-C upstream port, hard disks, mice, keyboards and other peripheral devices such can be connected directly to the CS2740. With a single USB-C cable on the CS2740, the computer can be integrated into the complete desktop workflow and is supplied with up to 60 watts of power. Plus, the monitor also has HDMI and DisplayPort inputs. This makes the ColorEdge CS2740 the central hub for discerning creative professionals.

Experience the CS2740 in AR now!

→ Product Website → Experience in AR

- 27-inch wide-gamut LCD with 3840 x 2160 pixels (4K-UHD) delivers ultra-sharp details
- Wide gamut covering 99% of the Adobe RGB colour gamut
- Precise hardware calibration of brightness, white balance and gamma
- Digital Uniformity Equalizer for top-rate luminance distribution and colour purity
- Colour precision with 16-bit look-up-table and up to 10-bit colour reproduction
- USB-C (DisplayPort signal channel and power supply up to 60 watts), DisplayPort and HDMI inputs
- USB hub with 2 5Gbps (USB 3) and 2 USB 2 downstream ports
- EIZO microchip ensures precise, consistent and lasting colour display
- Recommended optional accessories: Measurement sensor for hardware calibration and monitor hood
- 5-year warranty for highest investment security

GENERAL / LEGISLATION & STANDARDS

Certification	[illegible]
Case color	Black
Areas of application	Photography, [illegible]

SOFTWARE & ACCESSORIES

Product line	ColorEdge
Accompanying software and other accessories available for download	ColorNavigator, [illegible]
Other box contents	[illegible]
Specific system requirements	[illegible]
Accessories	[illegible]
EAN	[illegible]

WARRANTY

Warranty period	5 years for unit [illegible] operating hours, whichever comes first.
Sub-pixel defects	0 sub-pixel defects guarantee; no fully illuminated sub-pixels (sub-pixels ISO 9241-307) for six months from date of purchase.

SCREEN

Screen size (in inches)	27
Screen size (in cm)	[illegible]
Format	16:9
Viewable image size (width x height) (in mm)	596,2 x 335,4
Ideal and recommended resolution	3840 x 2160 (4K UHD)
Pixel pitch (in mm)	[illegible]
Pixel density (in ppi)	[illegible]
Supported resolutions	3840 x 2160 (4K UHD), 2560 x 1600, 2560 x 1440, 2560 x 1080, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480, [illegible]
Panel technology	[illegible]
Max. viewing angle horizontal	178
Max. viewing angle vertical	178
Number of colors or greyscale	1.07 billion colors (USB-C, 10-bit), 1.07 billion colors [illegible]
Color palette/look-up table	[illegible]
Max. color space (typical)	DCI-P3 ([illegible]), AdobeRGB (99%), ISO Coated v2 (>99%), Rec.709 (100%), EBU (100%), SMPTE-C (100%), sRGB (100%)
Max. brightness (typical) (in cd/m²)	[illegible]
Max. dark room contrast (typical)	[illegible]
Grey-to-grey response time (typical) (in ms)	[illegible]
Max. refresh rate (in Hz)	60
Backlight	LED

CONNECTIONS

Signal inputs	HDMI (Deep Color, HDCP 1.4/2.3), USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3)
USB specification	USB 5Gbps (USB 3)
USB upstream ports	1 x type C (DisplayPort Alt Mode, 60 W max.), 1 x type B
USB downstream ports	4 x Typ A (2 x 5Gbps (USB 3), 2 x USB 2)
Graphic signal	USB-C, DisplayPort, HDMI (RGB, YUV)

FEATURES & OPERATION

USB-C docking	✓
KVM switch	✓
Hardware calibration of brightness and luminance characteristics	✓
Preset color/grayscale modes	AdobeRGB, sRGB, additional memory spaces through [illegible]
Digital Uniformity Equalizer (image uniformity correction)	✓
[illegible]	✓
I/P conversion	✓
Noise suppression (HDMI)	✓
HDCP Decoder	✓
Automatic signal input recognition	✓
On-screen menu languages	de, en, fr, es, it, se
Adjustment options	Brightness, Contrast, Color temperature/White point, Gamma, Colour tone, Color saturation, Resolution, Scaling, Color matrix YUV/RGB, OSD language, Signal input, DUE priority
Button Guide	✓
Integrated power unit	✓

ELECTRICAL DATA

Frequency	USB-C/DisplayPort: 25.0 - 137 kHz, 23 - 61 Hz; HDMI: 15 - [illegible]
Power consumption (typical) (in watts)	38
Max. power consumption (in watts)	[illegible] USB ports in use)
Max. Power consumption in stand-by mode (in watts)	1
Power consumption with power switched off (in watts)	0
Energy efficiency class	[illegible]
Energy consumption/1000h (in kWh)	38
Power supply	AC 100-240V, 50/60Hz

DIMENSIONS & WEIGHT

Dimensions (incl. stand) (width x height x depth) (in mm)	638 x 404-559 x 265
Weight (incl. stand) (in kg)	10.3
Rotatability of the stand (in °)	344
Tiltability forwards/backwards (in °)	5 / 35
Pivot between portrait / landscape	clockwise
Height adjustment range (in mm)	155
Hole spacing	100 x 100

Find your local dealer
EIZO Europe GmbH
Belgrader Straße 2
41069 Mönchengladbach
Phone: +49 2161 8210-0
www.eizo.eu

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries or their respective companies. Copyright © 2024 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany. All rights, errors and modifications reserved. Latest update: 22.07.2024