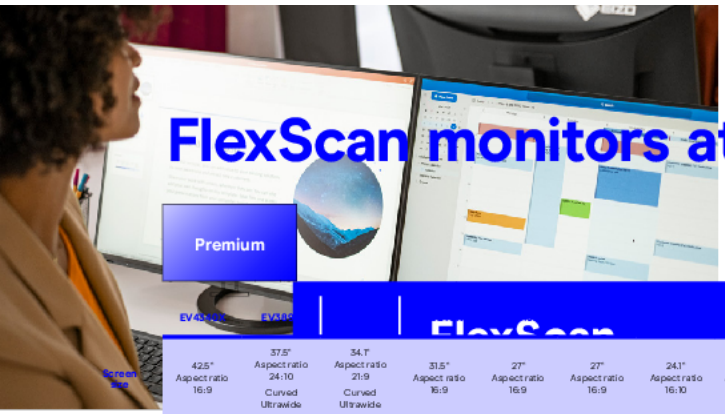

# FlexScan monitors at a glance

| | Premium | | | | | | | | Professional | | | | Basic | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | EV4320Z | EV3895 | | | | | | 90 | EV2740S | EV2720S | EV2485 | EV2480 | EV2410R | EV2460 | EV2360 |
| Screen size | 42.5" Aspect ratio 16:9 | 37.5" Aspect ratio 24:10 Curved Ultrawide | 34.1" Aspect ratio 21:9 Curved Ultrawide | 31.5" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 24.1" Aspect ratio 16:10 | 23.8" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 24.1" Aspect ratio 16:10 | 23.8" Aspect ratio 16:9 | 24.1" Aspect ratio 16:10 | 23.8" Aspect ratio 16:9 | 22.5" Aspect ratio 16:10 |
| Resolution | 3,840×2,160 (4K UHD) | 3,840×1,600 | 3,440×1,440 | 3,840×2,160 (4K UHD) | 3,840×2,160 (4K UHD) | 2,560×1,440 | 1,920×1,200 | 1,920×1,080 | 3,840×2,160 (4K UHD) | 2,560×1,440 | 1,920×1,200 | 1,920×1,080 | 1,920×1,200 | 1,920×1,080 | 1,920×1,200 |
| Max. Brightness | 350 cd/m² | 300 cd/m² | 300 cd/m² | 350 cd/m² | 350 cd/m² | 350 cd/m² | 350 cd/m² | 250 cd/m² | 350 cd/m² | 350 cd/m² | 350 cd/m² | 250 cd/m² | 350 cd/m² | 250 cd/m² | 250 cd/m² |
| Signal inputs | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× DisplayPort<br>1× HDMI<br>1× DVI-D<br>1× D-Sub | 1× DisplayPort<br>1× HDMI<br>1× DVI-D<br>1× D-Sub | 1× DisplayPort<br>1× HDMI<br>1× D-Sub |
| USB ports | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>2× USB-A | Upstream:<br>1× USB-C<br>2× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>2× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>2× USB-A |
| Webcam and microphone | – | – | ◆ | – | – | – | – | – | – | – | – | – | – | – | – |
| USB-C Power Delivery | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – |
| USB-C | – | – | – | – | – | ◆ | ◆ | ◆ | – | – | – | – | – | – | – |
| LAN port | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – | – | – | – | – |
| KVM Switch | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – | – | – | – | – |
| Tilt range | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front | Tilt range: 35° to the back 5° to the front |
| Swivel | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° | Swivel: 344° |
| Rotation | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° | Rotation: 90° |
| Stand | Height: 60mm | Height adjustment: 192.7mm | Height adjustment: 195mm | Height adjustment: 195mm | Height adjustment: 195mm | Height adjustment: 176.6mm | Height adjustment: 182.2mm | Height adjustment: 191.2mm | Height adjustment: 169mm | Height adjustment: 169mm | Height adjustment: 182.2mm | Height adjustment: 191.2mm | Height adjustment: 129.9mm | Height adjustment: 140mm | Height adjustment: 140mm |
| Five-Year Warranty | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |

**The m**

**and the**

**Optimal ergon**

- Height adju
- Anti-
- Flicker-free control
- Matte anti-
- Ideal for m

**Environmental**

- Daily Chrono
- High-
- Production
- Long-

Working with the Best

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries.
All other product names are trademarks or registered trademarks of their respective owners.
To assist you, we offer free loan units for testing and technical support in both pre-sales and after-sales.
Find your local sales partners or EIZO contact persons at: eizo.eu/contact
Copyright © 2025 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany.
All rights reserved. Errors and modifications are subject to change. Last updated: August 2025