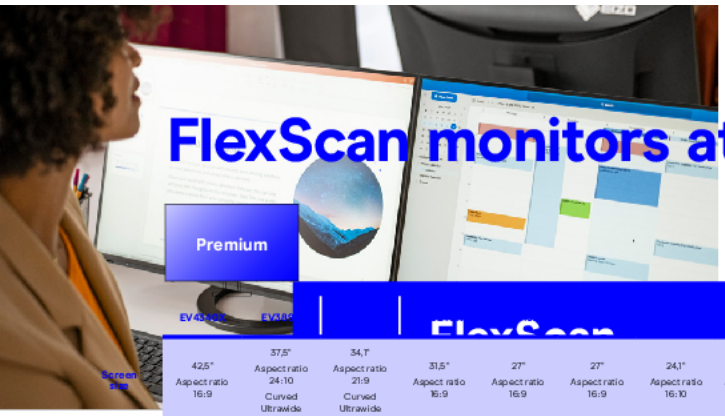

# FlexScan monitors at a glance

| | Premium | | | | | | | | Professional | | | Basic | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | EV4320Z | EV3895 | EV3895-90 | EV3285 | EV3285-90 | EV3275 | EV3275-90 | EV3240X | EV2781 | EV2485 | EV2480 | EV2760 | EV2456 | EV2430 | EV2460 | EV2360 |
| Screen size | 42,5" Aspect ratio 16:9 | 37,5" Aspect ratio 24:10 Curved Ultrawide | 34,1" Aspect ratio 21:9 Curved Ultrawide | 31,5" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 24,1" Aspect ratio 16:10 | 23,8" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 24,1" Aspect ratio 16:10 | 23,8" Aspect ratio 16:9 | 27" Aspect ratio 16:9 | 24,1" Aspect ratio 16:10 | 24,1" Aspect ratio 16:10 | 23,8" Aspect ratio 16:9 | 22,5" Aspect ratio 16:10 |
| Resolution | 3.840×2.160 (4K UHD) | 3.840×1.600 | 3.440×1.440 | 3.840×2.160 (4K UHD) | 3.840×2.160 (4K UHD) | 2.560×1.440 | 1.920×1.200 | 1.920×1.080 | 2.560×1.440 | 1.920×1.200 | 1.920×1.080 | 2.560×1.440 | 1.920×1.200 | 1.920×1.200 | 1.920×1.080 | 1.920×1.200 |
| Max. Brightness | 350 cd/m² | 300 cd/m² | 300 cd/m² | 350 cd/m² | 350 cd/m² | 350 cd/m² | 350 cd/m² | 250 cd/m² | 350 cd/m² | 350 cd/m² | 250 cd/m² | 350 cd/m² | 350 cd/m² | 300 cd/m² | 250 cd/m² | 250 cd/m² |
| Signal inputs | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>2× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 1× USB-C<br>1× DisplayPort<br>1× HDMI | 2× DisplayPort<br>1× HDMI<br>1× DVI-D | 1× DisplayPort<br>1× HDMI<br>1× DVI-D<br>1× D-sub | 1× DisplayPort<br>1× DVI-D<br>1× D-sub | 1× DisplayPort<br>1× HDMI<br>1× DVI-D<br>1× D-sub | 1× DisplayPort<br>1× HDMI<br>1× D-sub |
| USB Hub ports | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>2× USB-A | Upstream:<br>1× USB-C<br>2× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>2× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>1× USB-B<br>Downstream:<br>1× USB-C<br>3× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-C<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>2× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>2× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>4× USB-A | Upstream:<br>1× USB-B<br>Downstream:<br>2× USB-A |
| Built-in speakers | – | – | ◆ | – | – | – | – | – | – | – | – | – | – | – | – | – |
| USB-C Power Delivery | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – | – | – |
| USB-C Daisy Chaining | – | – | – | – | – | ◆ | ◆ | ◆ | – | – | – | – | – | – | – | – |
| Stand | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – | – | – | – | – | – |
| Kensington lock | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | – | – | – | – | – | – | – | – |
| Height adjustable stand | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Pivot: 90°<br>Height adjustment: 60 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Pivot: 70°<br>Height adjustment: 192.7 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Pivot: 90°<br>Height adjustment: 195 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Pivot: 90°<br>Height adjustment: 195 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Pivot: 90°<br>Height adjustment: 195 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 176.6 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 182.2 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 191.2 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 176.6 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 182.2 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 191.2 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 159 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 158.6 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 131 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 140 mm | Tilt range: 35° to the back 5° to the front<br>Swivel: 344°<br>Rotation: 344°<br>Height adjustment: 140 mm |
| Five-Year Warranty | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |

**The m**

**and the**

**Optimal ergon**

- Height adju
- Auto EcoVi
- Flicker-free control
- Matte anti-
- With built-in microphone
- Ideal for m

**Environmental**

- Eco Comme
- Highest
- Production

Working with the Best

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries.
All other product names are trademarks or registered trademarks of their respective owners.

We offer free loan units for testing and technical support in both pre-sales and after-sales.
Find your local sales partners or EIZO contact persons: **eizo.eu/contact**

Copyright © 2024 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany
All rights, errors and modifications are subject to change. Last updated: July 2024