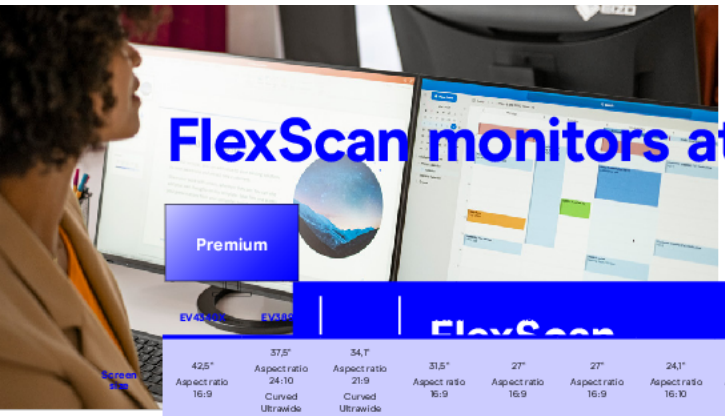

FlexScan monitors at a glance

	Premium								Professional			Basic				
	EV4320Z	EV3895	EV3895-90	EV3285	EV3285-90	EV3275	EV3275-90	EV3240X	EV2781	EV2485	EV2480	EV2760	EV2456	EV2430	EV2460	EV2360
Screen size	42,5" Aspect ratio 16:9	37,5" Aspect ratio 24:10 Curved Ultrawide	34,1" Aspect ratio 21:9 Curved Ultrawide	31,5" Aspect ratio 16:9	27" Aspect ratio 16:9	27" Aspect ratio 16:9	24,1" Aspect ratio 16:10	23,8" Aspect ratio 16:9	27" Aspect ratio 16:9	24,1" Aspect ratio 16:10	23,8" Aspect ratio 16:9	27" Aspect ratio 16:9	24,1" Aspect ratio 16:10	24,1" Aspect ratio 16:10	23,8" Aspect ratio 16:9	22,5" Aspect ratio 16:10
Resolution	3.840×2.160 (4K UHD)	3.840×1.600	3.440×1.440	3.840×2.160 (4K UHD)	3.840×2.160 (4K UHD)	2.560×1.440	1.920×1.200	1.920×1.080	2.560×1.440	1.920×1.200	1.920×1.080	2.560×1.440	1.920×1.200	1.920×1.200	1.920×1.080	1.920×1.200
Max. Brightness	350 cd/m²	300 cd/m²	300 cd/m²	350 cd/m²	350 cd/m²	350 cd/m²	350 cd/m²	250 cd/m²	350 cd/m²	350 cd/m²	250 cd/m²	350 cd/m²	350 cd/m²	300 cd/m²	250 cd/m²	250 cd/m²
Signal inputs	1× USB-C 1× DisplayPort 2× HDMI	1× USB-C 1× DisplayPort 2× HDMI	1× USB-C 1× DisplayPort 2× HDMI	1× USB-C 1× DisplayPort 2× HDMI	1× USB-C 1× DisplayPort 2× HDMI	1× USB-C 1× DisplayPort 1× HDMI	1× USB-C 1× DisplayPort 1× HDMI	1× USB-C 1× DisplayPort 1× HDMI	1× USB-C 1× DisplayPort 1× HDMI	1× USB-C 1× DisplayPort 1× HDMI	1× USB-C 1× DisplayPort 1× HDMI	2× DisplayPort 1× HDMI 1× DVI-D	1× DisplayPort 1× HDMI 1× DVI-D 1× D-sub	1× DisplayPort 1× DVI-D 1× D-sub	1× DisplayPort 1× HDMI 1× DVI-D 1× D-sub	1× DisplayPort 1× HDMI 1× D-sub
USB Hub ports	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 2× USB-A	Upstream: 1× USB-C 2× USB-B Downstream: 4× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 2× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 3× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 3× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 3× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 3× USB-A	Upstream: 1× USB-C 1× USB-B Downstream: 1× USB-C 3× USB-A	Upstream: 1× USB-C Downstream: 4× USB-A	Upstream: 1× USB-C Downstream: 4× USB-A	Upstream: 1× USB-C Downstream: 4× USB-A	Upstream: 1× USB-B Downstream: 4× USB-A	Upstream: 1× USB-B Downstream: 2× USB-A	Upstream: 1× USB-B Downstream: 2× USB-A	Upstream: 1× USB-B Downstream: 4× USB-A	Upstream: 1× USB-B Downstream: 2× USB-A
Built-in speakers	–	–	◆	–	–	–	–	–	–	–	–	–	–	–	–	–
USB-C Power Delivery	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	–	–	–	–	–
USB-C Daisy Chaining	–	–	–	–	–	◆	◆	◆	–	–	–	–	–	–	–	–
Stand	◆	◆	◆	◆	◆	◆	◆	◆	–	–	–	–	–	–	–	–
Kensington lock	◆	◆	◆	◆	◆	◆	◆	◆	–	–	–	–	–	–	–	–
Height adjustable stand	Tilt range: 35° to the back 5° to the front Swivel: 344° Pivot: 90° Height adjustment: 60 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Pivot: 70° Height adjustment: 192.7 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Pivot: 90° Height adjustment: 195 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Pivot: 90° Height adjustment: 195 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Pivot: 90° Height adjustment: 195 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 176.6 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 182.2 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 191.2 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 176.6 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 182.2 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 191.2 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 159 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 158.6 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 131 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 140 mm	Tilt range: 35° to the back 5° to the front Swivel: 344° Rotation: 344° Height adjustment: 140 mm
Five-Year Warranty	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆

The m

and the

Optimal ergon

- Height adju
- Auto EcoVi
- Flicker-free control
- Matte anti-
- With built-in microphone
- Ideal for m

Environmental

- Eco Comme
- Highest
- Production

Working with the Best

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries.
All other product names are trademarks or registered trademarks of their respective owners.

We offer free loan units for testing and technical support in both pre-sales and after-sales.
Find your local sales partners or EIZO contact persons: **eizo.eu/contact**

Copyright © 2024 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany
All rights, errors and modifications are subject to change. Last updated: July 2024